


PRW-2500T-7ER – Strap Adjustment

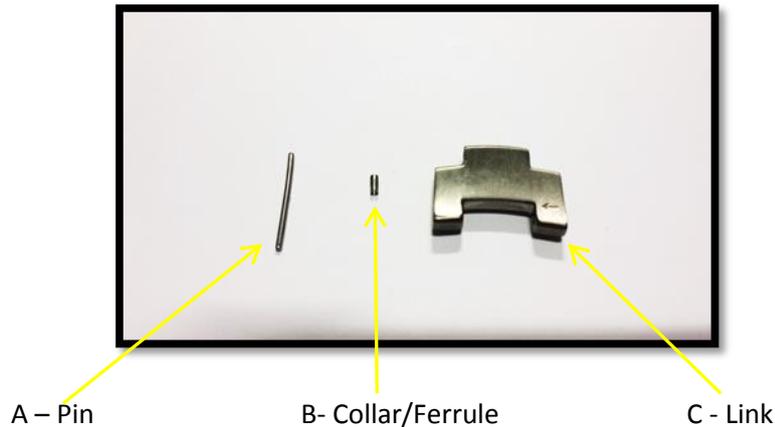

Step 1

Firstly work out how many links you need to take out of the watch, if you need to remove more than two we recommend removing equal numbers of links on each side of the watch face.

This will stop your watch looking lopsided.

Step 2

Unclip the watch and look at the back of the metal links, you will see on the back of most of the links have a small arrow. This indicates the links that you can remove and the direction in which you have to push the pin out from.




Step 3

Place a piece of paper down to catch the metal collar should it fall out. Use a thin instrument to push down the pin hole and gradually push the pin out on the other side of the link. When it gets to about half way you can use something like a pair of pliers to pull out the pin. This will then release the link; now gently shake the watch once or twice to remove the collar if it hasn't already fallen out, once you have this keep it safe as you will need it later.

Repeat the procedure until you have removed the required amount.

STEP 4 - Once this is done you will need to reattach the links to reform the strap. To do this you will need to insert the collar back into the link before you pass the pin through it, this will hold the pin in

place in the link and prevent it from falling out. The collar goes into the top of the middle section of a link as shown in the picture below with a yellow circle.

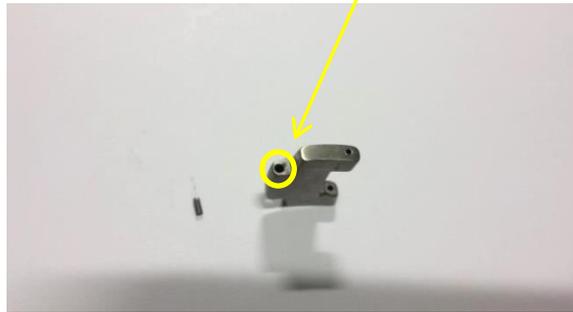

Now push the pin through the holes where it came from.

The link should now be attached nice and firmly.